

PlumbQwik[™]

by Fernco

- Creates a watertight seal between two plain ended pipes
- Designed for waste and grey water applications
- Connect what would normally be incompatible pipe systems
- Large range of straight and adaptor variations
- Extremely easy to fit using a nut driver
- Remove and re-fit as required



PlumbQwik[™] is a range of plumbing couplings by Fernco for above ground drainage applications, commonly found under kitchen sinks, shower trays, baths, behind washing machines etc.

Unlike many other plumbing couplings on the market, PlumbQwik's can connect any material pipe, provided it fits within the products size range. Made from flexible phthalate free PVC, the couplings can also adapt to imperfect

pipe alignment, making them ideal for repair scenarios and rectifying previous bad workmanship. The product range covers all common pipe sizes as straight or adaptor (also known as reducer) applications.



Straight PlumbQwik[™]



Adaptor PlumbQwik[™]



Elbow PlumbQwik[™]



Tee PlumbQwik[™]



End Cap PlumbQwik[™]

Fit horizontally or vertically

Strong stainless steel clamp bands

High quality PVC coupling body



Product Code	PQXXX
Description	PlumbQwik Coupling
Size Range	21-364mm
Material	PVC 1.4301 (304) Stainless Steel <i>Couplings with a different material makeup are available on request.</i>
Temperature Range	-34°C to 40°C constant, 60°C intermittent
Pressure Rating	0.5bar, 7.25psi



Straight PlumbQwik™ Range

Product Code	Reference	Size Range (mm)	Tightening Torque	Colour
PQ028	E028-028BL 027-027	21-29	6Nm	Black
PQ028_GREY	E028-028G	21-29	6Nm	Grey
PQ038	E038-038BL 035-035 TC-150	30-39	6Nm	Black
PQ038_GREY	E038-038G	30-39	6Nm	Grey
PQ042	E042-042BL 041-041	31-40	6Nm	Black
PQ042_GREY	E042-042G	31-40	6Nm	Grey
PQ045	E045-045BL 041-041	37-45	6Nm	Black
PQ045_GREY	E045-045G	37-45	6Nm	Grey
PQ050	E050-050BL 049-049	40-49	6Nm	Black
PQ050_GREY	E050-050G	40-49	6Nm	Grey
PQ058	E058-058BL 059-059	50-59	6Nm	Black
PQ058_GREY	E058-058G	50-59	6Nm	Grey
PQ063	E063-063BL 062-062	53-62	6Nm	Black
PQ063_GREY	E063-063G	53-62	6Nm	Grey
PQ068	070-070	60-69	6Nm	Black
PQ068_GREY	E068-068G	60-69	6Nm	Grey
PQ085	E085-085BL 086-086	75-86	6Nm	Black
PQ085_GREY	E085-085G	75-86	6Nm	Grey
PQ090	E090-090BL 090-090	78-89	6Nm	Black
PQ090_GREY	E090-090G	78-89	6Nm	Grey
PQ095	E095-095BL	85-96	6Nm	Black
PQ095_GREY	E095-095G	85-96	6Nm	Grey
PQ101	101-101	95-101	6Nm	Black
PQ112	112-112	101-112	6Nm	Black
PQ112_GREY	E112-112G	101-112	6Nm	Grey
PQ122	E122-122BL 121-121	110-123	6Nm	Black
PQ122_GREY	E122-122G	110-123	6Nm	Grey
PQ130_GREY	E130-130G	120-130	6Nm	Grey
PQ133	133-133	127-133	6Nm	Black
PQ142	142-142	136-142	6Nm	Black
PQ162	162-162	152-162	6Nm	Black
PQ188	188-188	180-188	6Nm	Black



Adaptor PlumbQwik™ Range

Product Code	Reference	Size Range A (mm)	Size Range B (mm)	Tightening Torque	Colour
PQ040-032		32-41	25-33	6Nm	Black
PQ040-032_GREY	E040-032G	32-41	25-33	6Nm	Grey
PQ045-038_GREY	E045-038G DTC038 DTC-110	37-46	30-39	6Nm	Grey
PQ050-032_GREY	E050-032G	42-51	25-33	6Nm	Grey
PQ050-042	E050-042BL 049-041	40-49	32-41	6Nm	Black
PQ050-042_GREY	E050-042G	40-49	32-41	6Nm	Grey
PQ058-038	060-034 060-038	50-59	30-39	6Nm	Black
PQ058-038_GREY	E058-038G	50-59	30-39	6Nm	Grey
PQ058-045	E058-045BL 059-048 061-047	50-59	37-46	6Nm	Black
PQ058-045_GREY	E058-045G	50-59	37-46	6Nm	Grey
PQ070-060	070-060	65-70	57-60	6Nm	Black
PQ085-058	E085-058BL 084-060	75-86	50-59	6Nm	Black
PQ085-058_GREY	E085-058G	75-86	50-59	6Nm	Grey
PQ085-068_GREY	E085-068G	75-86	60-69	6Nm	Grey
PQ086-047	086-047	80-86	44-47	6Nm	Black
PQ101-089	101-089	95-101	85-89	6Nm	Black
PQ112-045	E112-045BL 111-049	100-113	37-46	6Nm	Black
PQ112-045_GREY	E112-046G	100-113	37-46	6Nm	Grey
PQ112-050	E112-050BL 111-049	98-111	40-49	6Nm	Black
PQ112-050_GREY	E112-050G	98-111	40-49	6Nm	Grey
PQ112-085	E112-085BL 111-085	100-113	75-86	6Nm	Black
PQ112-085_GREY	E112-085G	100-113	75-86	6Nm	Grey
PQ113-059	113-059	106-113	53-59	6Nm	Black
PQ122-112	E122-112BL 123-111	110-123	100-113	6Nm	Black
PQ122-112_GREY	E122-112G	110-123	100-113	6Nm	Grey
PQ124-118	1003-44	114-124	104-118	6Nm	Black
PQ127-115	127-115	118-127	104-115	6Nm	Black
PQ130-122_GREY	E130-122G	118-131	110-123	6Nm	Grey
PQ133-084	133-084	111-133	79-84	6Nm	Black
PQ133-112	133-112	111-133	104-112	6Nm	Black
PQ135-115	135-115	113-135	107-115	6Nm	Black
PQ135-115_GREY	E135-115G	113-135	107-115	6Nm	Grey
PQ142-111	142-111	136-142	101-111	6Nm	Black
PQ160-133	160-133	149-160	111-133	6Nm	Black
PQ163-111	163-111	155-163	101-111	6Nm	Black
PQ187-111	187-111	177-187	101-111	6Nm	Black
PQ190-162	190-162	177-190	152-162	6Nm	Black



Elbow PlumbQwik™ Range

Product Code	Reference	Size Range (mm)	Tightening Torque	Colour
PQE038	E038LBL	30-38	6Nm	Black
PQE038_GREY	E038LG	30-38	6Nm	Grey
PQE048	048L	41-48	6Nm	Black
PQE048_GREY	048LG	41-48	6Nm	Grey
PQE062	060L	54-62	6Nm	Black
PQE062_GREY	060LG	54-62	6Nm	Grey
PQE085	085L	80-89	6Nm	Black
PQE085_GREY	085LG	80-89	6Nm	Grey
PQE112	112L	105-116	6Nm	Black
PQE112_GREY	112LG	105-116	6Nm	Grey
PQE112	112L	105-116	6Nm	Black
PQE112_GREY	E112LG	105-116	6Nm	Grey



Tee PlumbQwik™ Range

Product Code	Reference	Size Range (mm)	Tightening Torque	Colour
PQT038	E038TBL	30-38	6Nm	Black
PQT038_GREY	E038TG	30-38	6Nm	Grey
PQT048	048T	41-48	6Nm	Black
PQT048_GREY	048TG	41-48	6Nm	Grey
PQT062	060T	54-62	6Nm	Black
PQT062_GREY	060TG	54-62	6Nm	Grey
PQT085	085T	80-89	6Nm	Black
PQT085_GREY	085TG	80-89	6Nm	Grey
PQT112	112T	105-116	6Nm	Black
PQT112_GREY	112TG	105-116	6Nm	Grey



End Cap PlumbQwik™ Range

Product Code	Reference	Size Range (mm)	Tightening Torque	Colour
PQC028	028C	25-28	6Nm	Black
PQC042	042C	35-47	6Nm	Black
PQC048	E048C	43-50	6Nm	Black
PQC048_GREY	E048CG	43-50	6Nm	Grey
PQC060	060C	54-63	6Nm	Black
PQC070	070C	60-70	6Nm	Black
PQC089	085C	80-89	6Nm	Black
PQC100	100C	88-100	6Nm	Black
PQC112	112C	108-114	6Nm	Black
PQC112_GREY	E112CG	105-116	6Nm	Grey
PQC125	125C	115-125	6Nm	Black
PQC142	142C	135-146	6Nm	Black
PQC162	162C	150-162	6Nm	Black
PQC181	181C	170-181	6Nm	Black
PQC215	215C	204-220	6Nm	Black
PQC230	230C	233-237	6Nm	Black
PQC250	250C	243-257	6Nm	Black
PQC274	274C	268-280	6Nm	Black
PQC328	328C	322-334	6Nm	Black
PQC358	358C	352-364	6Nm	Black

Installation



1. Mark both pipes from the end to be connected, half the width of the coupling, less the required joint gap, which is usually 10mm.




2. Slide the coupling fully over one of the pipes.



3. Align the pipes and slide the coupling onto the other pipe, ensuring the coupling face and marked line are flush. Tighten this clamp band.



4. Position the remaining pipe, ensuring the coupling face and marked line are flush. Tighten this clamp band.

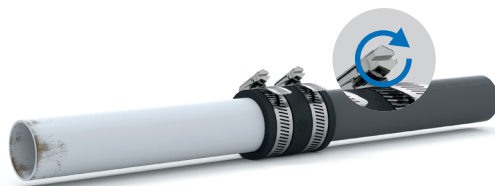

5. Tighten the clamp bands to the recommended torque.

Note: The above instructions outline the method of connecting two pipes of the same diameter using a Straight PlumbQwik. This method can also be followed to make connections using other couplings in the PlumbQwik range.

General Information

Quality, Standards and Approvals

Fernco has been certified by the British Standards Institution (BSI) as a company of assessed capability, with a quality management system which meets the requirements of BS EN ISO 9001:2015

Fernco UK, part of a global group of companies, are the leaders in wastewater connection innovation; utilising the most advanced methods and techniques for precision-manufactured products, all of which comply with or exceed relevant British and European standards to ensure reliability and sustainability.

Environment

Fernco operate Environmental Management Systems which are certified to ISO 14001: 2015.

Supply

Fernco are proud members of the Builders Merchants Federation (BMF). All Fernco products are supplied through a national and global network of distribution and merchant partners. For stockist details, contact Fernco.

Technical Support

Fernco have a team of product experts on hand to support all customers with technical support and advice.

Contact Fernco Technical Department:

Tel: +44 (0) 1226 344100

Email: technical@fernco.co.uk

Enquiries

UK Sales:

Tel: +44 (0) 1226 340 888

Email: sales@fernco.co.uk

International Sales:

Tel: +44 (0) 1226 344 105

Email: export.dept@fernco.co.uk