

fort[®]

SMART SECURITY PRODUCTS

At ESP[®] we create simple, smart solutions for a safer and more comfortable home. Discover a whole range of smart home products. From smart alarm kits, smart cameras, smart sensors and smart door bells, all working together to make your home smarter and safer.

 **ClickSmart+**

All of ESP's Fort products are compatible with the Click Smart+ app.

Peace of mind away from home. Easily check and change the status of your Fort devices wherever you are.





ECSPK1 Smart Security Alarm Kit 1

Kit Contains:
1 x Smart hub, 1 x PIR, 1 x Door/Window Contact,
1 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included



ECSPK3 Smart Security Alarm Kit 3

Kit Contains:
1 x Smart hub, 3 x PIR, 2 x Door/Window Contact,
2 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included



ECSPK5 Smart Security Alarm Kit 5

Kit Contains:
1 x Smart hub, 1 x Pet PIR, 1 x Door/Window
Contact, 1 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included



ECSPK2

Smart Security Alarm Kit 2

Kit Contains:

1 x Smart hub, 2 x PIR, 1 x Door/Window Contact, 1 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included



ECSPK4

Smart Security Alarm Kit 4

Kit Contains:

1 x Smart hub, 4 x PIR, 2 x Door/Window Contact, 2 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included



ECSPK6

Smart Security Alarm Kit 6

Kit Contains:

1 x Smart hub, 2 x Pet PIR, 2 x Door/Window Contact, 2 x Remote Control

- Smart Alarm Kit
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included






ECSPHB
Smart Security Alarm Hub



- Smart Alarm Hub
- Wi-Fi Enabled with GSM Back-up Facility
- Activations and Monitoring Supported via APP
- No Additional Subscriptions or Fees Required
- Supports up to 32 RF Devices
- Built-in siren (95dB)
- Built-in Backup Battery, With Up To 8 Hours Standby Time
- 80 Meter Open Field RF Transmission (433Mhz)
- 2.4GHz Wi-Fi Connection Required
- Sim Card Not Included

General Information

Material	ABS
Operating Voltage	12VDC 1A
Backup Battery	Internal 7.4V600mAh Li-Po Battery
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Network Connection	Wi-Fi 2.4GHz
GSM (SIM Required)	850/900/1800/1900 MHz
Internal Siren	95dB
System Requirements	Mobile Device Running IOS 8 or Higher or Android 4.1x or Higher
Dimensions	109.5mm x 109.5mm x 40mm
Operating Conditions	-10°C ~ 55°C

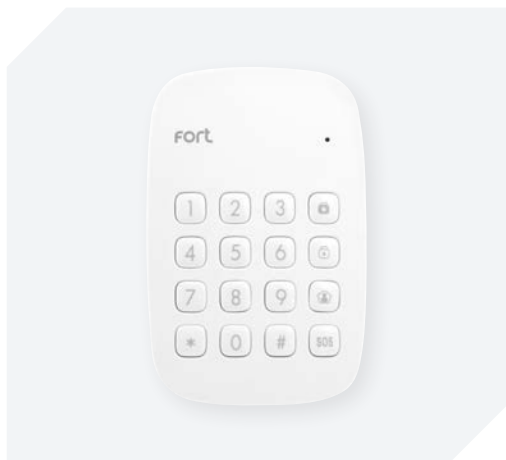

ECSPKY
Smart Security Alarm Keypad



- Smart Alarm Keypad
- Requires Smart Alarm Hub (ECSPHB)
- 80 Meter Open Field RF Transmission (433Mhz)
- Arm, Disarm, Home Mode and Panic Function
- Supports up to 50 Proximity Tags (ECSPPX)
- Battery Powered (Supplied)
- Low Power Indication
- Tamper Protection

General Information

Material	ABS
Operating Voltage	3 x AAA Batteries
Minimum Battery Life	1 Year (dependant on activations)
Total fobs	50
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Dimensions	135mm x 90mm x 15mm
Operating Conditions	-10°C ~ 55°C

- Smart Alarm Door/Window Contact
- 80 Meters Open Field RF Transmission (433Mhz)
- Requires Smart Alarm Hub (ECSPHB)
- Suitable for Doors & Windows
- Battery Powered (Supplied)
- Low Power Indication
- Tamper Protection



General Information

Material	ABS
Operating Voltage	1 x CR2477 3V Battery
Minimum Battery Life	1 Year (dependant on activations)
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Transmitter Dimensions	55.7mm x 30.3mm x 16mm
Magnet Dimensions	25mm x 10mm x 9mm
Operating Conditions	-10°C - 55°C

ECSPCT

Smart Security Alarm Contact



- Smart Alarm Vibration Sensor
- Battery Powered (Supplied)
- Low Power Indication
- 80 Meter Open Field RF Transmission (433Mhz)
- Requires Smart Alarm Hub (ECSPHB)



General Information

Material	ABS
Operating Voltage	1 x CR2477 3V Battery
Minimum Battery Life	1 Year (dependant on activations)
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Force Sensitivity	10 - 50 grams
Dimensions	60mm x 39mm x 17mm
Operating Conditions	-10°C - 55°C

ECSPVS

Smart Security Alarm Vibration Sensor





ECSPPIR
Smart Security Alarm PIR



- Smart Alarm PIR
- 80 Meter Open Field RF Transmission (433Mhz)
- Detection Coverage: 8m/110°
- Requires Smart Alarm Hub (ECSPHB)
- Battery Powered (Supplied)
- Low Power Indication
- Tamper Protection

General Information

Material	ABS
Operating Voltage	2 x AA Batteries
Minimum Battery Life	1 Year (dependant on activations)
PIR Detection Range	8m
PIR Detection Angle	110°
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Dimensions	107mm x 53mm x 32mm
Operating Conditions	-10°C – 55°C



ECSPPET
Smart Security Alarm Pet PIR



- Smart Alarm PET PIR
- 80 Meter Open Field RF Transmission (433Mhz)
- Requires Smart Alarm Hub (ECSPHB)
- Detection Coverage: 8m/110°
- Battery Powered (Supplied)
- Pet Friendly < 25Kg
- Low Power Indication
- Tamper Protection

General Information

Material	ABS
Operating Voltage	2 x AA Batteries
Minimum Battery Life	1 Year (dependant on activations)
PIR Detection Range	8m
PIR Detection Angle	110°
Pet Tolerance	<25kg
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Dimensions	107mm x 53mm x 32mm
Operating Conditions	-10°C – 55°C

- Smart Alarm Remote Control
- 80 Meter Open Field RF Transmission (433Mhz)
- Arm, Disarm, Home Mode and Panic Function
- Requires Smart Alarm Hub (ECSPHB)
- Battery Powered (Supplied)
- Low Power Indication



ECSPRC

Smart Security Alarm Remote Control



General Information

Material	ABS
Operating Voltage	1 x CR2025 3V Battery
Minimum Battery Life	1 Year (dependant on activations)
Device Input	4 buttons - Disarm, Arm, Home Arm, SOS
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Dimensions	3.4mm x 1.1mm x 6.3mm
Operating Conditions	-10°C - 55°C

- Smart Alarm RF Signal Booster
- USB Powered with Recharging Backup Battery
- 80 Meter Open field RF Transmission (433Mhz)
- Requires Smart Alarm Hub (ECSPHB)



ECSPBST

Smart Security Alarm Booster



General Information

Material	ABS
Operating Voltage	5V 1.1A (USB)
Backup Battery	3.7V 300mAh Lithium Battery
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Dimensions	60mm x 39mm x 17mm



- Requires Smart Alarm Hub (ECSPHB) & Keypad (ECSPKY)
- Smart Alarm Proximity Tag (2 Pack)
- Disarm the System via Proximity

ECSPPX
Smart Security Alarm Fob



General Information

Material	ABS
Operating Frequency	125KHz
Dimensions	3mm x 0.7mm x 4.5mm



- Smart Alarm SOS Button
- Raise an Alert Instantly
- Battery Powered (Supplied)
- 80 Meter Open Field RF Transmission (433Mhz)
- Requires Smart Alarm Hub (ECSPHB)

ECSPSOS
Smart Security Alarm SOS Control



General Information

Material	ABS
Operating Voltage	1 x CR2025 3V Battery
Minimum Battery Life	1 Year (dependant on activations)
Device Input	1 button - SOS
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Dimensions	3.4mm x 0.7mm x 6.3mm
Operating Conditions	-10°C - 55°C

- Smart Alarm External Solar Powered Siren
- Built-In Siren (110dB) and LED Indication
- Suitable for Outdoor Use (IP44 Ingress Protection)
- Compact Design: 162x182mm
- Rechargeable Backup Battery, with up to 40 Day Standby
- Low Power Indication
- Tamper Protection
- 80 Meter Open Field RF Transmission (433Mhz)
- For use with Smart Alarm Hub (ECSPHB)



ECSPEXS

Smart Security Alarm Solar Siren

General Information

Material	ABS
Operating Voltage	Solar Powered
Battery Backup	Lithium 18650 3.7V/2200mAh
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Ingress Protection	IP44
Dimensions	162mm x 182mm x 65mm
Operating Conditions	-10°C - 55°C



- Smart Alarm External Mains Powered Siren
- Built-In Siren (110dB) and LED Indication
- Suitable for Outdoor Use (IP44 Ingress Protection)
- Compact Design: 162x182mm
- Rechargeable Backup Battery, with up to 40 Day Standby
- Low Power Indication
- Tamper Protection
- 80 Meter Open Field RF Transmission (433Mhz)
- For use with Smart Alarm Hub (ECSPHB)



ECSPEXS

Smart Security Alarm Wired Siren

General Information

Material	ABS
Operating Voltage	12V DC
Battery Backup	Lithium 18650 3.7V/2200mAh
Device Communication	RF 433 MHz
Transmission Distance	80m (Open field)
Anti-Tamper	Built-in Microswitch
Ingress Protection	IP44
Dimensions	162mm x 182mm x 65mm
Operating Conditions	-10°C - 55°C





ECSPCAMSLW WHITE ECSPCAMSLB BLACK
Smart Security Floodlight Camera



- Full 1080p HD Live View & Recording
- No Subscription or Additional Fees Required
- 110° Wide Angle Camera View
- 5000K LED Lamp
- 2500 Lumen Output (25w)
- Motion Activated Video Record
- Clear Two-Way Audio
- Remotely Activate or Dim LED Lamp
- IP65 Rated Ingress Protection
- Requires 2.4GHZ Wi-Fi Network Connection
- Operating Temperature: -10 +40°C
- Dimensions: 258 x 88 x 184mm

General Information

Camera Resolution	1920 x 1080
Angle of View	110°
Storage Device	Micro SD Card (128GB Max.)
WiFi Frequency	2.4GHz
Infrared Range	5-10m
Light Output	2500 Lumens (25 Watts)
IP Rating	IP65
Power	110 - 220 VAC
Dimensions	258mm x 188mm x 184mm



ECSPCAMFLW WHITE ECSPCAMFLB BLACK
Smart Security Spotlight Camera



- Full 1080p HD Live View & Recording
- No Subscription or Additional Fees Required
- 110° Wide Angle Camera View
- 5000K LED Lamp
- 2000 Lumen Output (25w)
- Motion Activated Video Record
- Clear Two-Way Audio
- Remotely Activate or Dim LED Lamp
- IP65 Rated Ingress Protection
- Requires 2.4GHZ Wi-Fi Network Connection
- Operating Temperature: -10 +40°C
- Dimensions: 283 x 133 x 184 mm

General Information

Camera Resolution	1920 x 1080
Angle of View	110°
Storage Device	Micro SD Card (128GB Max.)
WiFi Frequency	2.4GHz
Infrared Range	5-10m
Light Output	2000 Lumens (25 Watts)
IP Rating	IP65
Power	110 - 220 VAC
Dimensions	283mm x 133mm x 184mm

- Full 1080p HD Live View, Recording & Visitor Notifications
- No Subscription or Additional Fees Required
- Battery Powered with up to 750 Activations on Full Charge
- Plug-in RF Chime Included
- IP54 Rated Ingress Protection
- 5m Infrared LED Illumination
- 3m PIR Detection Range
- 130° Wide Angle Camera View
- Motion Activated Video Record (Storage Included)
- Clear Two-Way Audio

General Information

Camera Resolution	1920 x 1080
Sensor Size	1/2.9"
Lens	4mm Fixed
Viewing Angle	130°
Infrared Distance	5 meters
PIR Distance	3 meters
Storage	Micro SD (up to 128GB)
Connectivity	Wi-Fi 2.4GHz
Power	2 x Rechargeable 18650 3.7 3350mAh Lithium-Ion Batteries
Dimensions	140.51mm x 50mm x 29mm



ECSPDB
Smart Security Doorbell



- Full 1080p HD Live View & Recording
- No Subscription or Additional Fees Required
- Battery Powered with up to 750 Activations on Full Charge
- 8m Infrared LED Illumination
- 7m PIR Detection Range
- 130° Wide Angle Camera View
- Motion Activated Video Record (Storage Included)
- Clear Two-Way Audio
- IP65 Rated Ingress Protection

General Information

Camera Resolution	1920 x 1080
Sensor Size	1/2.9"
Lens	3.3mm
Viewing Angle	125°
Infrared Distance	7 meters
PIR Distance	6 meters
Storage	Micro SD (up to 128GB)
Connectivity	Wi-Fi 2.4GHz
Power	2 x Rechargeable 18650 3.7 3350mAh Lithium-Ion Batteries
Dimensions	100.72mm x 57mm x 59.93mm



ECSPCAM65
Smart Security External Camera





ECSPCAM
Smart Security Camera



- Full 1080p HD Live View & Recording
- Motion Activated Video Record (Storage Included)
- No Subscription or Additional Fees Required
- 10m Infrared LED Illumination
- 85° Wide Angle Camera View
- Clear Two-Way Audio

General Information

Camera Resolution	1920 x 1080
Sensor Size	1/2.7"
Lens	4mm Fixed
Viewing Angle	85°
Infrared Distance	10 meters
Storage Device	Micro SD Card (128GB Max.)
Connectivity	Wi-Fi 2.4GHz
Power	5VDC1.1A (Micro-USB 1m supplied)
Dimensions	70mm x 70mm x 91mm



ECSPCAMPT
Smart Security PT Camera



- Full 1080p HD Live View & Recording
- No Subscription or Additional Fees Required
- 355° Pan and 180° Tilt Remote Control Function
- 3-5m Infrared LED Illumination
- 140° Wide Angle View
- Motion Tracking and Record
- Clear Two-Way Audio
- 2.4Ghz Wi-Fi Connection Required

General Information

Camera Resolution	1920 x 1080
Sensor Size	1/2.7"
Viewing Angle	140°
Infrared Distance	3-5 meters
Storage Device	Micro SD Card (128GB Max.)
Connectivity	Wi-Fi 2.4GHz
Power	5VDC1.1A (Micro-USB 1m supplied)
Dimensions	Ø75mm x 114mm